


babyhug™

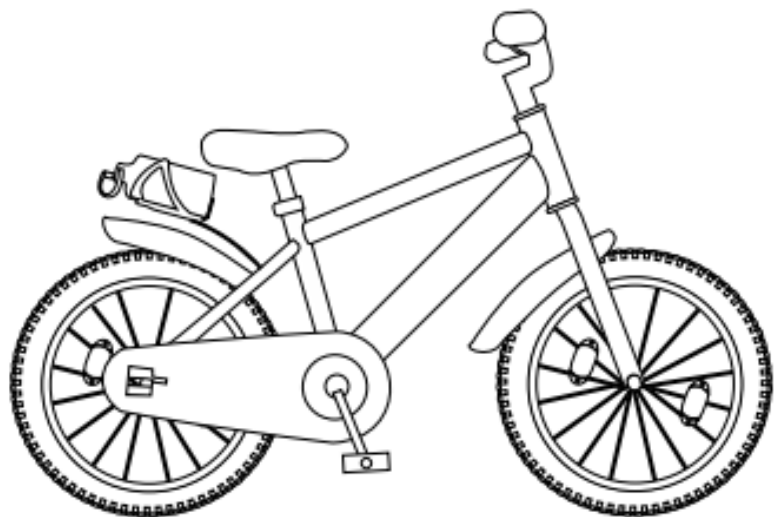


Features

- Durable metal frame allow from greater impact resistance
- Rubberised tyres for superior grip
- Comes with fully enclosed Chain guard* and bottle holder with bottle
- Height adjustable seat
- Training wheels* helps kids to balance and learn faster.
- Caliper Brakes with high quality brake pads
- High quality bell mounted to enhance safety

Marked with (*) is for 14 & 16 inch bikes only

Rapid Bicycle

1. Attach Pedals

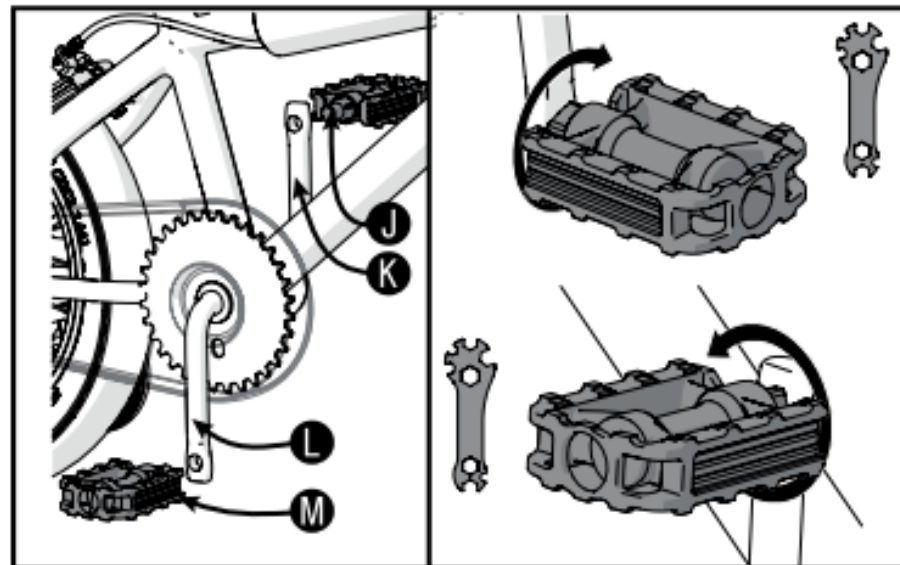

WARNING! The Pedals are Different, they have different threads for each side of the bicycle.




NOTE! Your pedals are in a separate box within the main carton.



NOTE! The pedals J & M have indication for Left & Right to match with crank.

To prevent damage to the threads, only tighten the pedals in the direction indicated.

2. Attach Stabilisers (Training Wheels) in 14 & 16 Inch

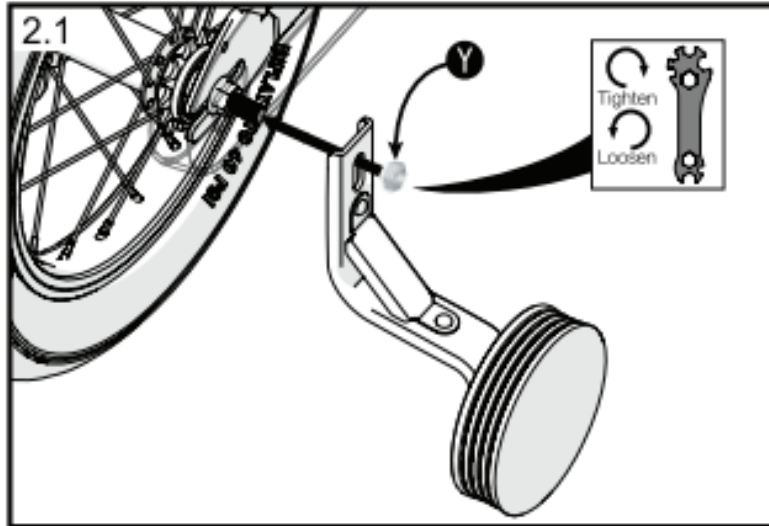

2.1 Attach stabilisers

WARNING! Before the bike is ridden, the stabilisers must be correctly adjusted and then

Adjustment.


Remove the outer domed nut **Y**. Fit a stabiliser arm onto the axle making sure it snugly fits.

Replace the domed nut and secure it finger tight to allow adjustment. Repeat for other side.

NOTE: If stabilisers are fitted correctly, the bike should rock a little side to side. If the stabilisers are both touching the ground all the time, your child will appreciate natural balance and will rely too heavily on them.

3. Attach Handle Bars

WARNING! When fitting the handlebar and stem assembly, make sure it is inserted properly. Failure to observe this warning may result in serious personal injury.

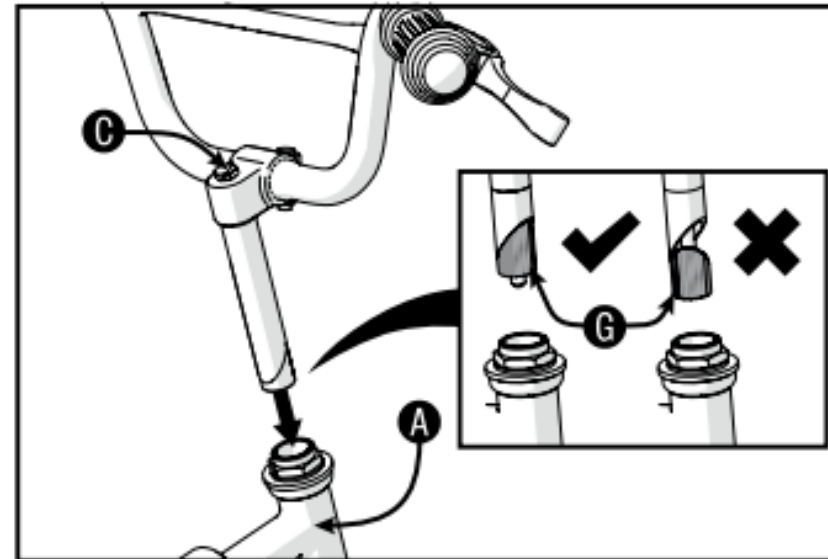


Insert the Quill stem.

Loosen the stem bolt **C** to allow the wedge nut **G** to move freely.

Insert the stem **C** into the head tube of the bike **A**, Ensuring that the wedge nut **G** is correctly aligned with the stem.

4. Saddle Fitment

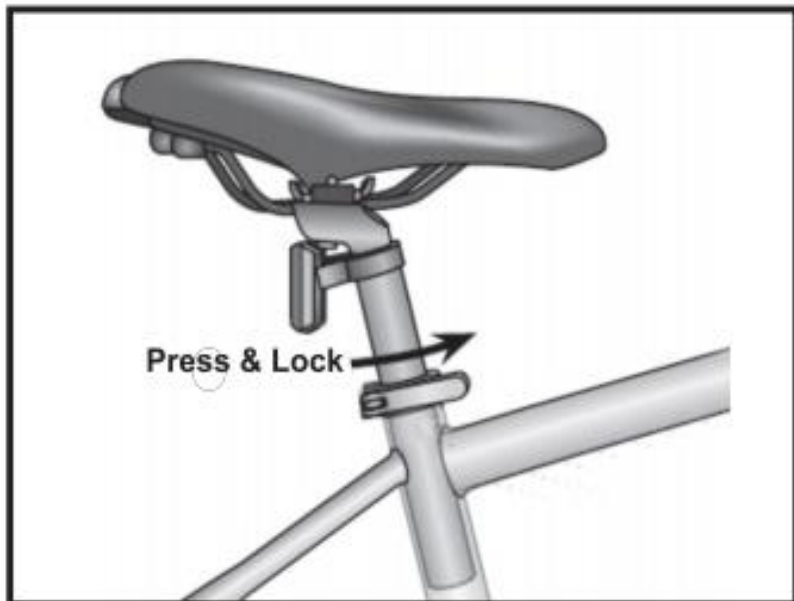

Insert the seatpost and saddle.

Insert the seat post into the seat tube.

Securing seatpost (Quick Release)

Secure the seatpost clamp by tightening the seatpost Quick Release and the pressing & locking the clamp of it.




WARNING! When fitting the seatpost, make sure it is inserted properly.

Failure to observe this warning may result in serious personal injury.

5. Handlebar Bell Installation

1. Remove screws from Bell.
2. Position Bell on handlebar within easy reach, with hands on the handlebar grips.
3. Install screws and tighten.



NOTE: Bell may attach with 1 or screws.

ROUTINE MAINTENANCE

NOTE!

In order to ensure the safety of the rider, regular checks should be made on the brakes, tyre condition, steering (including the handlebar grips) and wheel rims. If any components are found to be damaged or excessively worn they should be immediately changed using genuine replacement parts.

Check on the following every 2 weeks:

- Lubricate the chain using a suitable light oil.
- Check all parts of the bike are securely fitted.
- Check that the tyres are in good condition.
- Check the condition of the brake blocks/pads.
- Check that the wheel spokes are tight.



- These points are extremely important and should be read, understood and implemented before riding your bicycle. Failure to observe these warnings may result in serious injury and/or damage to the bike.
- These notes should be read and understood as the information may be useful to you in assembling of the bike.
- Representative images are used throughout this guide, Your bike may differ from that shown.

