

### Warning

- Inspect the stroller properly every time before placing your baby in it
- Never leave your baby unattended in the stroller
- Do not hang or place anything so heavy on the handle that the stroller becomes prone to tipping over backwards
- Before use make sure all the locking devices are inspected and secure
- The stroller is designed for babies between 0 to 36 Months and maximum carrying capacity is 15 kg
- Objects in the net basket should not weigh more than 1.5 kg
- The product is not suitable for running or skating
- To prevent possible suffocation, the plastic bags must be kept away from children
- Keep the product away from fire
- Always use the product on smooth and even surface

### Maintenance

- For cleaning the fabric, remove the screw and take it out of the stroller
- Wipe the fabric lightly with natural soap and cold water. Let it air dry *Babyhug liquid laundry detergent is best recommended.*
- Do not bleach, press or dry-clean the fabric of the stroller
- Wipe the metal and plastic parts of the stroller with a wet cloth. Do not use harsh chemicals for cleaning
- Keep checking the stroller for loose screws, damaged parts or broken threads

### Imported & Marketed By:

Brainbees Solutions Pvt. Ltd.  
Corporate & Registered Office Address :  
Rajashree Business Park, Plot No: 114,  
Survey No. 338, Tadiwala Road,  
Near Sohrab Hall, Pune 411 001

### Customer Care :

☎ 020 - 30556310  
✉ customercare@brainbees.com

Made in PRC

07

Carrying Capacity | Age Group  
Up to 15 Kg | 0 to 36 Months

## User's Manual > Little Star Baby Stroller

Style Code : B6ST013




**babyhug™**

baby stroller

- Light Weight
- 5 Point Safety Harness
- Adjustable Leg Rest

Before using the stroller read the manual thoroughly and carefully.  
Keep the manual handy for any future reference.




### Using the Rear Wheel Brakes

To apply the brakes use your feet and push the brakes downward, and lift upward to release it as shown in Fig. 8b


### Safety Harness

- The belt comes in three parts. Simply insert the male parts on the shoulder and side belts into the female part of the crotch belt and press slightly to lock as shown in Fig. 9a and 9b
- To disengage the lock, press the button on the belt and then pull apart as shown in Fig. 9c

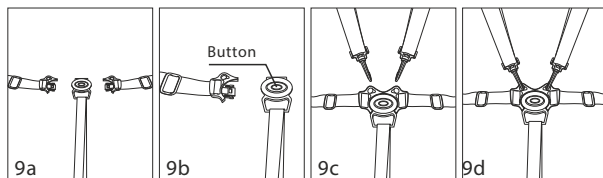

### Folding Instruction

- Brake the rear wheels and lock the front swivel wheels
- Push the canopy backwards as shown in Fig 10a
- Make sure the seat of the stroller is in the flat position or sleeping position
- As shown in Fig 10b, pull the folding pedal upward to unlock the folding system
- Put the folding hook in place to keep it compact. Fig. 10c

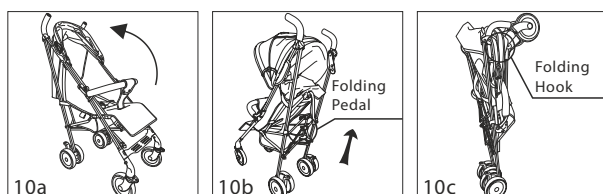


05

### Assembly Instructions:


#### Unfold the Baby Stroller

- Take the stroller out of the package
- Release the folding hook and then push the pushing handle and front wheels in opposite directions as shown in Fig. 1a
- As shown in Fig 1b and 1c, lift the handle upwards while letting the front wheel slide forward till a 'click' sound is heard from the joints. This confirms that the joint of the handle has locked securely
- Do not open the safety lock while the stroller is in use

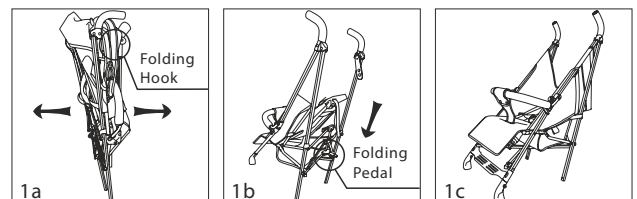


#### Install the Front Wheels

As shown in Fig. 2, insert each front wheel into the holes on respective front legs of the stroller and push upwards till a 'click' sound is heard.



02


**Component:**

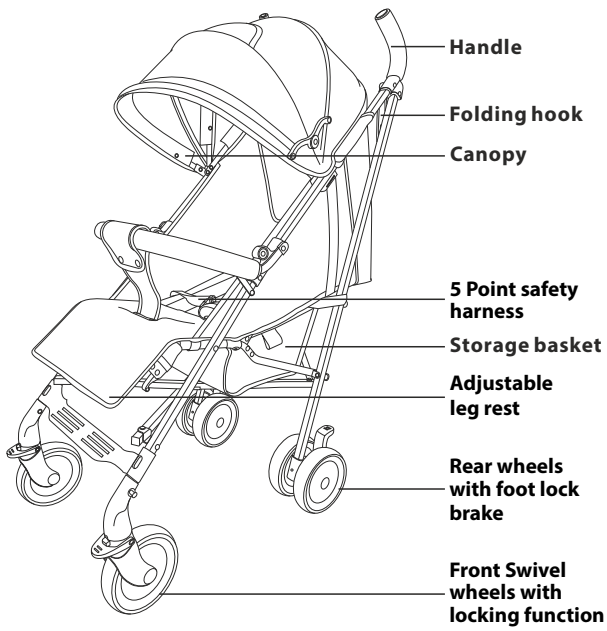


01

**Dismantling the Stroller**


**How to Remove :**



**Front Wheels** - Press the iron sheet button inside the plastic part as shown in Fig.11 on each front leg of the stroller and remove the front wheels




**Rear Wheels** - Press the spring clip with one hand, as shown in Fig.12, and remove the rear wheels with the other hand



**Canopy** - Hold the ends of the canopy and pull it out as shown in Fig.13


06



Spring Clip


**Install the Rear Wheels**

As shown in Fig. 3, insert the rear wheels into the rear wheel legs till the spring clip is fixed into the slot of the wheel connectors.



**Install the Canopy**

As shown in Fig. 4, insert the canopy end into the plastic connector.



Adjustment button





**Adjustment of Backrest**

As shown in Fig. 5, use the backrest adjustment belt and button simultaneously to adjust the position of the seat. For the sitting position, hold the belt with one hand, press the adjustment button and push the seat upward. For sleeping position press the adjustment button and pull the seat downwards.


03

**Adjustment of Canopy**

The canopy can be folded and unfolded by pushing it backward or pulling it forward respectively as shown in Fig 6a, 6b and 6c



Adjustment Button




**Adjustment of Leg Rest**

Press the leg rest adjustment button and adjust the leg rest upward or downward as shown in Fig 7a and 7b.

**Front Swivel Wheel**

If the fixed clip is raised, the front wheels will swivel. If the fixed clips are pushed down, the front wheels can't swivel around the front pipe as shown in Fig. 8a.



Fixed Clip/ Swivel Lock

04