

## Warning and Caution

- This tricycle is fit for children between the ages of 1.5 to 3 years old
- Maximum carrying capacity of this tricycle is 25 kg
- Never leave your child unattended when the tricycle is in use
- Avoid using the tricycle near stairs or irregular surfaces as riding in these places may cause injury to the child.
- Do not use the tricycle on a sloping street or driveway.
- Do not let another child push the tricycle with a baby on it.

## Care and Maintenance

- To avoid any kind of injury please check all the parts of the tricycle regularly.
- Adult supervision is required for first time users
- For prolonged usage keep the rotary parts well lubricated
- Do not let children place their hands, feet or any part of the body or clothing near the moving parts of the vehicle.
- This ride-on contains small parts. When unassembled please store these parts carefully and keep away from children.
- Adult supervision is required at all times to prevent any injury that may occur to the child.

### Imported For & Marketed By:

Brainbees Solutions Pvt Ltd  
Corporate & Registered Office Address:  
Rajashree Business Park, Plot No: 114,  
Survey No. 338, Tadiwala Road,  
Near Sohrab Hall, Pune 411 001

### Customer Care :

☎ 020-30556310  
✉ [customercare@brainbees.com](mailto:customercare@brainbees.com)

Made in PRC


1.5 to 3  
Years

Carrying Capacity  
up to 25 Kg

User's Manual

Musical Froggy Tricycle

Style Code : B6BR022

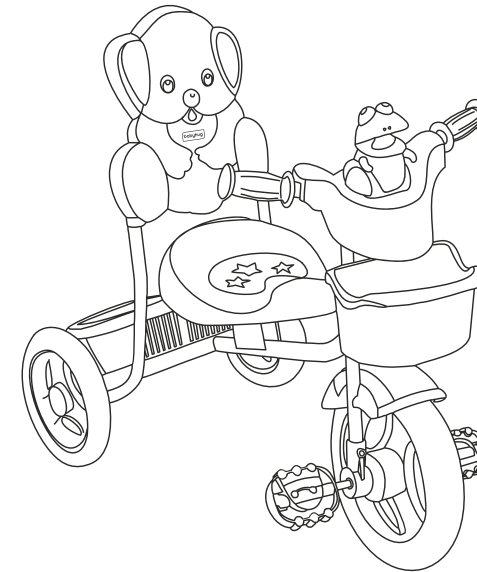


babyhug™

tricycle

- High Back-rest
- Front & Rear Basket
- Music


Please read this instruction manual carefully to learn the use of this vehicle and to teach your child safe and enjoyable driving. Retain these details for future reference.

## Assembly Steps

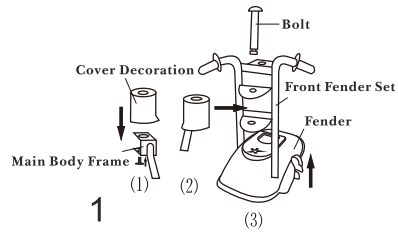

### Front Fender Assembly

As shown in figure bring the main body frame and the front fender together and join them with the plastic bushing. Align the holes of the fender, the main body frame and the plastic bushing in a straight line. Run the bolt through them to fix them in place. Insert the front mud guard into the fork of the front fender.

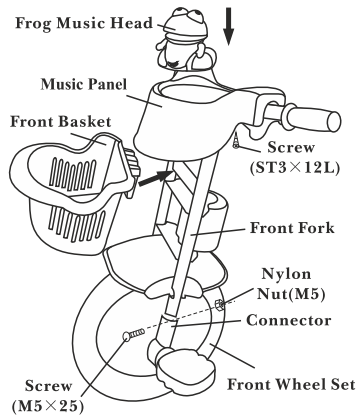


### Front Wheel Assembly

The front wheel comes with the paddles attached to it. As shown in figure, insert the fork ends of the fender in to the connectors provided on the front wheel. Fix them in place with two M5\*25L screws and bolts. Use a screw driver to tighten them in place.


### Front Basket and Music Head Assembly

As shown in figure above the front mud guard there is a slot provided for the front basket. Just mount the front basket on this slot and press it down to fix it. Insert the music casing in between the two handles and screw it in place with two ST3\*12L screws. Put three batteries into the froggy music head and fix it in place on top of the music casing where slots are provided to hold it.

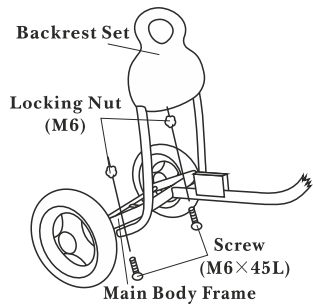


### Front Basket and Music Head Assembly

As shown in figure (Fig3 in manual Step 4 in video) above the front mud guard there is a slot provided for the front basket. Just mount the front basket on this slot and press it down to fix it. Insert the music casing in between the two handles and screw it in place with two ST3\*12L screws. Put three batteries into the froggy music head and fix it in place on top of the music casing where slots are provided to hold it.

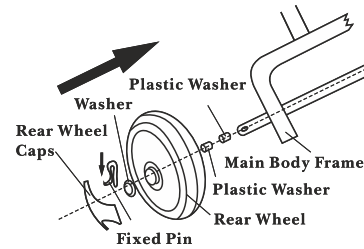


### Rear Wheel Assembly

As shown in figure take the rear wheel axle and put it through the plastic washer and the rear wheel. Insert another washer on the other side of the wheel and insert the fixed pin after this washer. Bend the fixed pin to keep it in place. Follow the same process for both the right and left rear wheels. Cover the pins with the wheel caps.

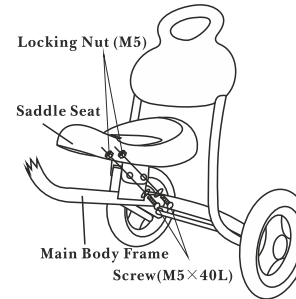

### Seat Assembly

As shown in figure (Fig 5 in manual and Step 7 in video) screw the saddle seat on to the main body frame with two M5\*40 L screws and nuts.

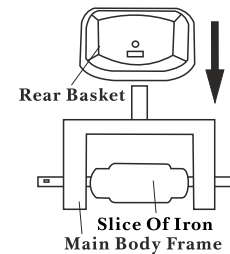

### Back Basket Assembly

As shown in figure place the back basket of the tricycle on the slot provided for it between the back wheels on the main body frame. Screw it in place with two M5\*15L screws and nuts.